


MOD. VB060M




Technical specifications

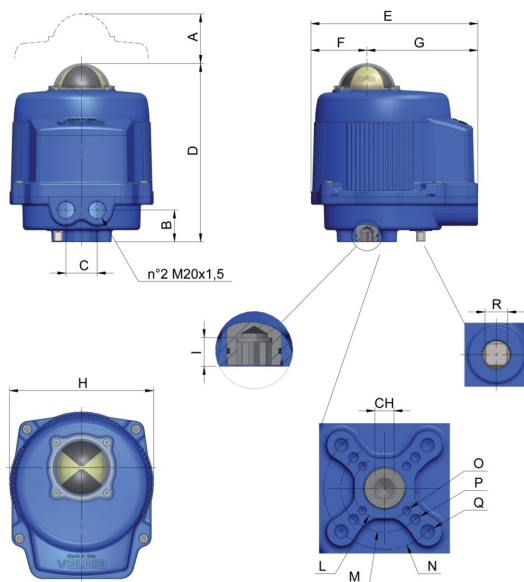


SIZE	PATTERN ISO 5211	CH	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R
VB060M	F05-F07	14	5.47	2.20	1.38	8.66	7.76	2.48	5.28	6.93	0.63	-	1.97	2.76	-	1/4-20 UNC 2B x 0.55"	5/16-18 UNC 2B x 0.59"	0.39

Electrical diagrams


ELECTRIC WIRING WITH MIDDLE POSITION FROM VB030M TO VB350M 24V AC/DC 50/60Hz, 100-240V AC 50/60Hz

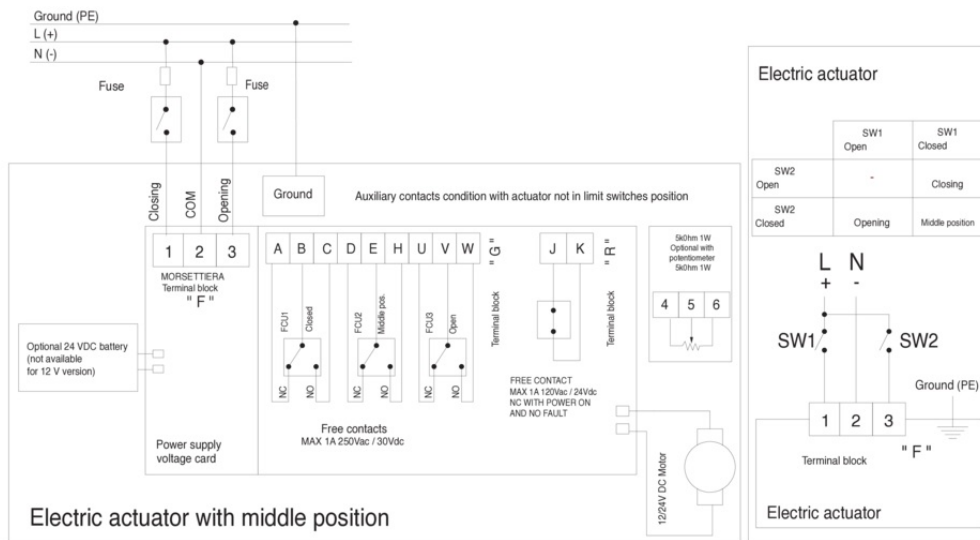

ELECTRIC WIRING WITH POSITIONER FROM VB030M TO VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz

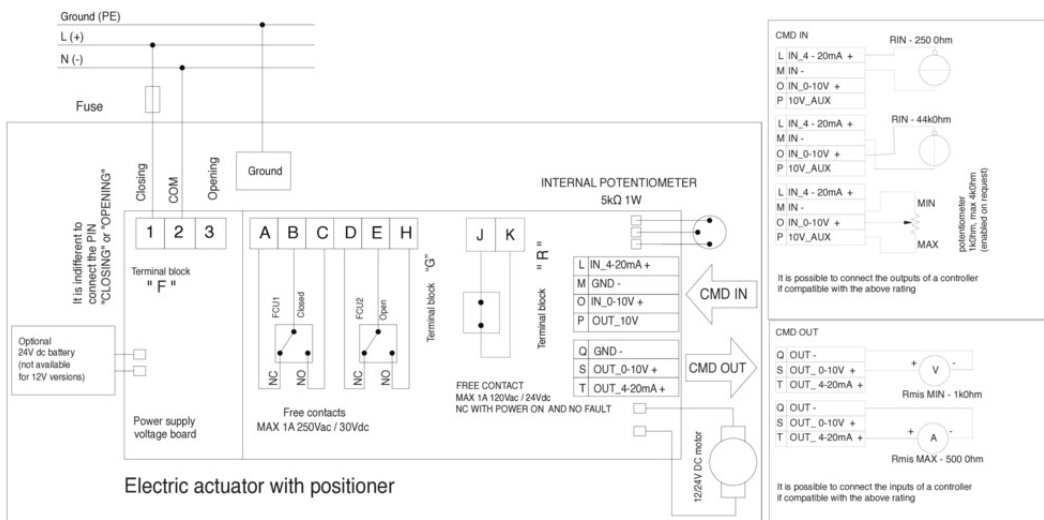

ELECTRIC WIRING FROM VB030M TO VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz

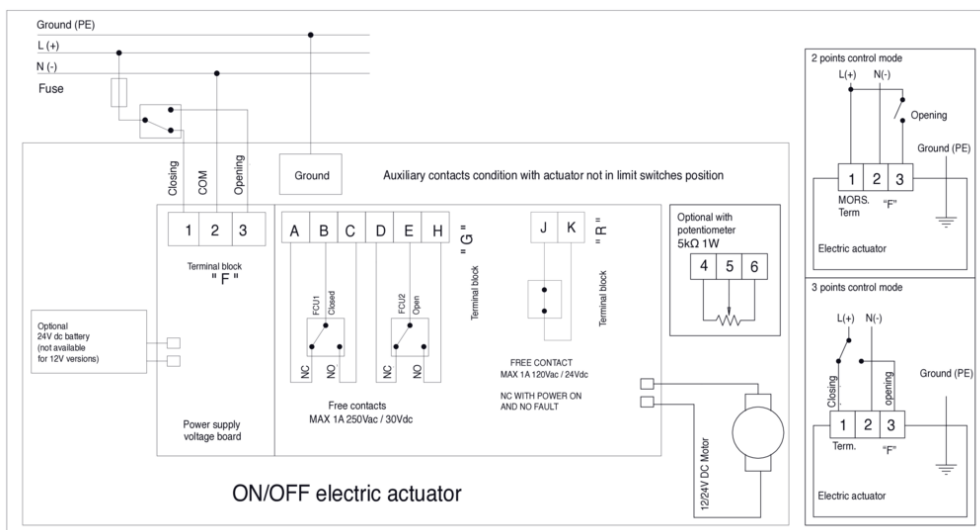

Certifications



CSA International