




BONOMI
NORTH AMERICA

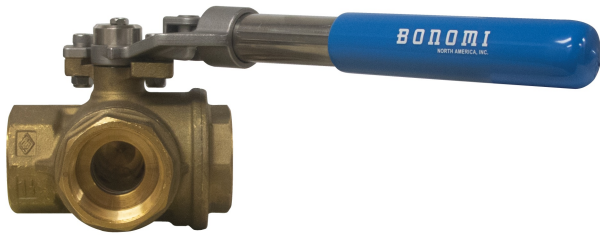


365N LF SRL (L) DEADMAN SPRING RETURN

3-way lead free brass ball valve, FNPT threaded, standard port, with deadman spring return handle.

- Pressure rating 400 WOG-100 WSP.
- Temperature range -4°F to +366°F.
- ANSI B1.20.1 connections.
- Blow-out proof stem, SLT, coated LF brass ball and double O-ring stem packing.
- PTFE seats with O-ring backing for low operating torque.
- 100% electronically tested in the open and closed position at 80 psi.
- Four seat design for sealing between pressurized ports. 355N LF SRL: size 1/4" to 2". 365N LF SRL: size 1/4" to 2".

Technical specifications

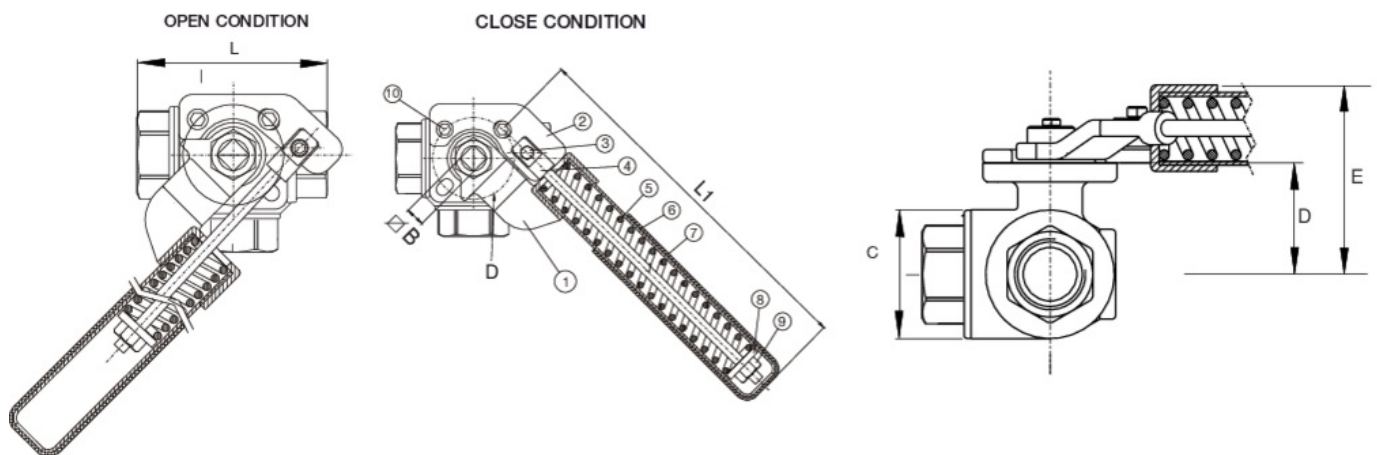

POSITION	PART NAME	MATERIAL
1	HANDLE HEAD	HANDLE HEAD
2	ANCHOR	ANCHOR
3	ANCHOR SCREW	ANCHOR SCREW
4	SPRING ROD	SPRING ROD
5	SPRING	SPRING
6	HANDLE EXTENSION	HANDLE EXTENSION
7	SLEEVE	SLEEVE
8	WASHER	WASHER
9	HEX NUT	HEX NUT
10	SOCKET HEAD SCREW	SOCKET HEAD SCREW

SIZE	L	B	D ISO 5211	HANDLE TORQUE (IN/LBS)	E	D	C	WEIGHT (LBS) 355NLF SRL	WEIGHT (LBS) 365NLF SRL
1/4"	6.7	0.35	F03	1.7	1.2	1.34	1.2	2.25	2.25
3/8"	6.7	0.35	F03	1.7	1.2	1.34	1.2	2.25	2.25
1/2"	6.7	0.35	F03	1.7	1.2	1.34	1.2	2.25	2.25
3/4"	6.7	0.35	F03	1.79	1.29	1.53	1.29	2.25	2.25
1"	8.65	0.43	F05	2.79	1.63	1.89	1.63	2.25	2.25
1 1/4"	8.65	0.43	F05	2.93	1.85	2.36	1.85	2.25	2.25
1 1/2"	8.65	0.43	F05	3.52	2.34	2.83	2.34	3	3
2"	11	0.55	F07	3.82	2.9	3.38	2.91	3	3

Certifications



UL certified

HEALTH
EFFECTS
US-CA NSF372
NSF61

HEALTH EFFECTS



TSSA