




6600 LL

CARBON STEEL SEAL WELD BALL VALVE

Unibody carbon steel FNPT, seal welded threaded ball valve with locking handle, full port.

- Working pressure is 2000 psi (1/4" to 2") - 200 psi steam.
 - Temperature range -40°F to 450°F.
 - Self-adjusting stem packing.
 - Blow-out proof stem design.
 - 100% air tested under water at 80 psi.
 - Mounting pad for actuator.
 - 25% carbon filled TFE seats.
 - Graphite stem packing.
 - Fire Safe design.
 - NACE MR 0175.
- 6600LL: size 1/4" to 2".

Technical specifications

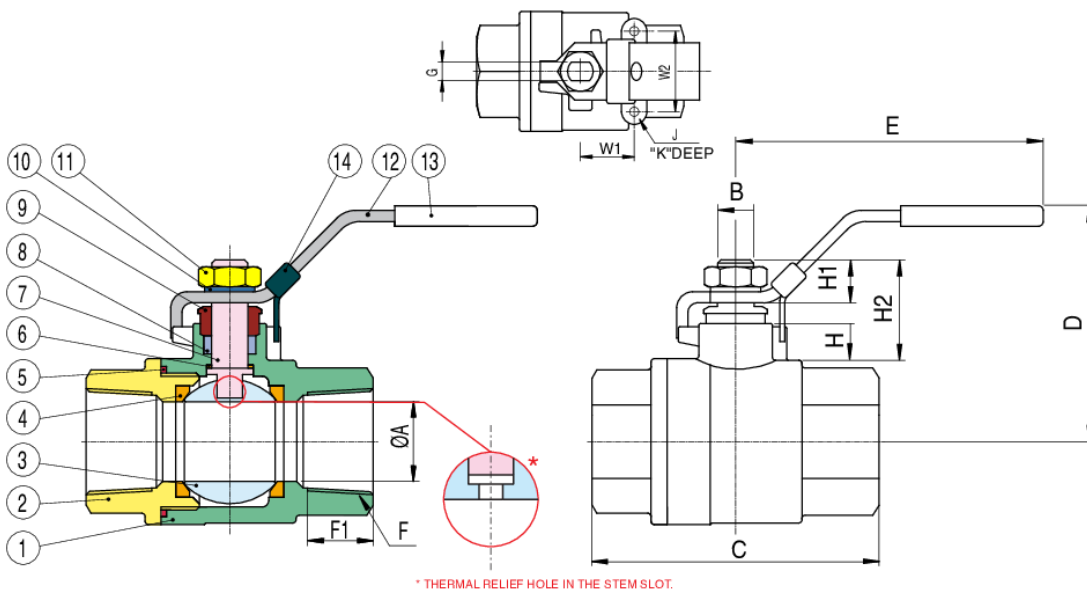

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	WCB	1
2	END CAP	WCB	1
3	BALL	AISI 316	1
4	SEAT	RTFE	2
5	JOINT GASKET	PTFE	1
6	THRUST WASHER	PTFE	1
7	STEM	AISI 316	1
8	V RING PACKING	PTFE	1
9	GLAND BUSH	STEEL	1
10	STEM WASHER	STEEL	1
11	STEM NUT	STEEL	1
12	HANDLE	STEEL	1
13	HANDLE SLEEVE	VINYL	1
14	LOCKING DEVICE	AISI 304	1

SIZE	ØA	B	C	D	E	F1	J	K	G	H	H1	H2	W1	W2	CV	WEIGHT LBS
1/4"	0.45	0.31	2.16	1.96	3.93	0.59	10-24UNC	0.23	-	0.31	0.38	0.87	0.5	1.12	8	0.51
3/8"	0.49	0.31	2.16	1.96	3.93	0.59	10-24UNC	0.23	0.19	0.31	0.38	0.87	0.5	1.12	10	0.51
1/2"	0.59	0.37	2.55	2.36	5.11	0.62	10-24UNC	0.19	0.25	0.41	0.43	1	0.5	1.12	15	0.83
3/4"	0.78	0.37	2.93	2.51	5.11	0.66	10-24UNC	0.27	0.25	0.41	0.43	1	0.88	1.37	34	1.14
1"	0.98	0.43	3.46	2.79	6.49	0.94	10-24UNC	0.27	0.31	0.45	0.53	1.24	0.92	1.37	56	2.02
1 1/4"	1.25	0.43	4.01	3.07	6.49	0.86	1/4-20UNC	0.27	0.31	0.45	0.53	1.24	1	1.5	85	2.7
1 1/2"	1.49	0.55	4.33	3.38	7.48	0.88	1/4-20UNC	0.27	0.38	0.47	0.61	1.38	1	1.5	125	4.18
2"	1.96	0.55	4.92	3.74	7.48	1.02	1/4-20UNC	0.27	0.38	0.37	0.61	1.02	1	1.5	250	6.86