



## 8E068

Electric actuator with 2 way brass ball valve direct mount with stainless steel ball and stem (RB 253N).

OPERATING CONDITIONS: fluid H<sub>2</sub>O - T 68°F

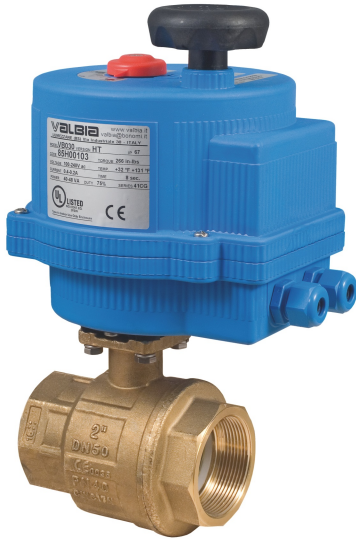

### Technical specifications

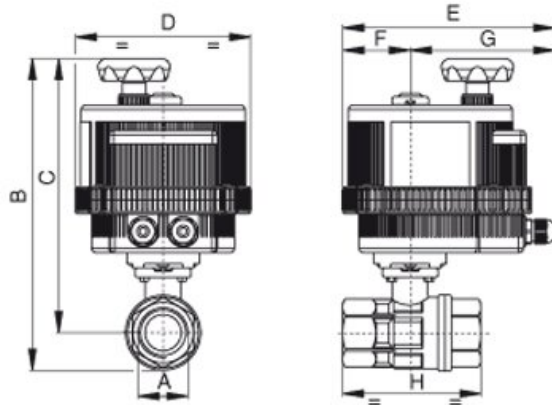

| SIZE | PSI | B     | C     | D    | E    | F    | G    | H    | ACT.   |
|------|-----|-------|-------|------|------|------|------|------|--------|
| -    | 600 | 8.33  | 7.36  | 4.84 | 6.41 | 1.67 | 4.74 | 3.35 | VB 015 |
| -    | 600 | 11.36 | 9.92  | 6.18 | 7.50 | 2.38 | 5.12 | 4.13 | VB 030 |
| -    | 600 | 8.65  | 7.50  | 4.84 | 6.41 | 1.67 | 4.74 | 3.66 | VB 015 |
| -    | 600 | 7.51  | 6.85  | 4.84 | 6.41 | 1.67 | 4.74 | 2.64 | VB 015 |
| -    | 600 | 7.51  | 6.85  | 4.84 | 6.41 | 1.67 | 4.74 | 2.64 | VB 015 |
| -    | 600 | 12.08 | 10.28 | 6.18 | 7.50 | 2.38 | 5.12 | 4.80 | VB 030 |
| -    | 600 | 14.20 | 11.94 | 7.28 | 8.43 | 2.66 | 5.77 | 6.10 | VB 060 |
| -    | 600 | 14.99 | 12.31 | 7.28 | 8.43 | 2.66 | 5.77 | 6.89 | VB 060 |
| -    | 600 | 7.72  | 6.93  | 4.84 | 6.41 | 1.67 | 4.74 | 3.00 | VB 015 |
| -    | 600 | 7.51  | 6.85  | 4.84 | 6.41 | 1.67 | 4.74 | 2.64 | VB 015 |
| -    | 600 | 17.00 | 13.73 | 8.31 | 9.33 | 3.31 | 6.02 | 8.03 | VB 110 |