




## 724101 SRL



Carbon steel direct mount, ASME/ANSI class 150  
Wafer-style flanged ball valve, full port with deadman  
spring return handle.

- Temperature range -4°F to +366°F.
  - Anti-static stem device.
  - TFM-MPTFE ball seats and thrust washer standard.
  - Triple stem seals-two Viton (FKM) O-rings and one PTFE seat.
  - ISO 5211 mounting pad/square stem.
  - 17-4 PH stem.
  - Lockable spring return handle.
- 724101 SRL: size 1" to 3".

### Technical specifications

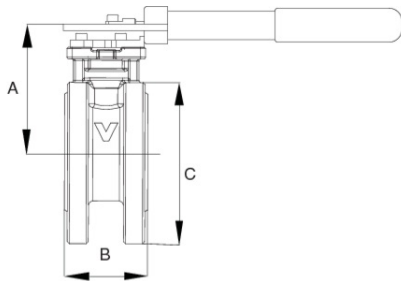

| POSITION | PART NAME         | MATERIAL       | N.º PIECES |
|----------|-------------------|----------------|------------|
| 1        | HANDLE HEAD       | ASTM A351-CF8M | 1          |
| 2        | ANCHOR            | ASTM A351-CF8M | 1          |
| 3        | ANCHOR SCREW      | AISI 316       | 1          |
| 4        | SPRING ROD        | AISI 316       | 1          |
| 5        | SPRING            | AISI 301       | 1          |
| 6        | HANDLE EXTENSION  | AISI 304       | 1          |
| 7        | SLEEVE            | VINYL          | 1          |
| 8        | WASHER            | AISI 304       | 1          |
| 9        | HEX NUT           | AISI 304       | 1          |
| 10       | SOCKET HEAD SCREW | AISI 304       | 1          |

| SIZE   | A    | B    | C    | D ISO 5211 | E     | F MM | VALVE TORQUE IN. LBS. | HANDLE TORQUE IN. LBS. |
|--------|------|------|------|------------|-------|------|-----------------------|------------------------|
| 1"     | 2.76 | 1.89 | 4.33 | F05        | 8.75  | 11   | 85                    | 195                    |
| 1 1/4" | 3.23 | 2.13 | 5.12 | F05        | 8.75  | 11   | 112                   | 195                    |
| 1 1/2" | 3.66 | 2.5  | 5.51 | F05        | 11.5  | 11   | 142                   | 195                    |
| 2"     | 4    | 3.23 | 6.1  | F05        | 11.5  | 11   | 169                   | 195                    |
| 2 1/2" | 5.06 | 4.06 | 7.09 | F07        | 17.72 | 14   | 275                   | 487                    |
| 3"     | 5.43 | 4.8  | 7.48 | F07        | 17.72 | 14   | 381                   | 487                    |