




## 68R415

### API 608 SUPER DUPLEX STAINLESS STEEL BALL VALVE

- Super Duplex stainless steel, ANSI class 600, flanged ball valve, full port.
- API 608, ASME B16.34, ASME B16.10, ASME B16.5, ASME B1.1 design.
  - Temperature range -4°F to 366°F.
  - 100% tested according to API 598 standards.
  - RTFE seats, packing and thrust washer.
  - Blow-out proof stem, locking handle.
  - Fire Safe API 607.
  - Antistatic Device.
  - ISO 5211 mounting pad with double “D” stem.
  - Locking device.
- 68R415: sizes 1/2” to 2”.



## Technical specifications

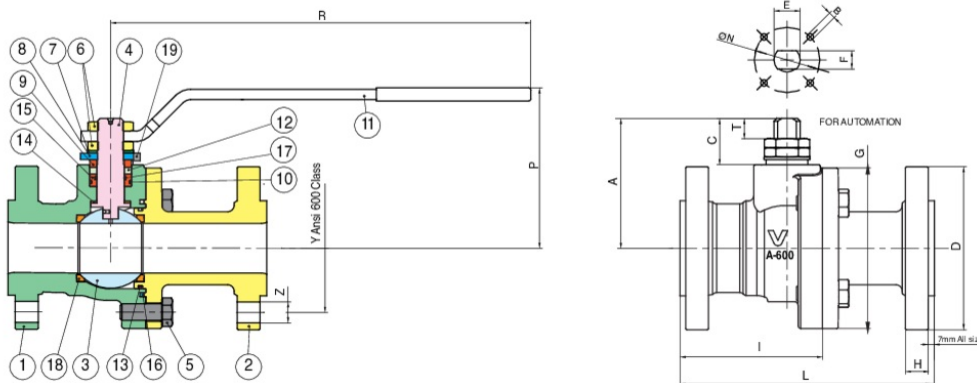

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	UNS S32760 (ASTM A995-GR. 6)	1
2	END CONNECTION	UNS S32760 (ASTM A995-GR. 6)	1
3	BALL	UNS S32760 (ASTM A995-GR. 6)/A479-F55	1
4	STEM	A564 TP630 H115OD (17-4-PH)	1
5	SCREW	A193 B8 Cl.2	4-6
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	AISI 316	1
9	BUSH	A479-TP316L	1
10	O-RING	FKM (VITON)	1
11	HANDLE	AISI 316	1
12	STEM SEAL	GRAPHITE	1
13	O-RING	FKM (VITON)	1
14	THRUST WASHER	RPTFE	1
15	O-RING BUSH	A479-TP316L	1
16	BODY SEAT	GRAPHITE	1
17	O-RING	FKM (VITON)	2
18	BALL SEAT	RPTFE	2
19	SCREW	A2-70	1

SIZE	D	Y	ØZ	H	I	L	G	P	R	A	T	E	F	ISO 5211 ØN	B	BREAK TORQUE (IN/LBS)	CV	WEIGHT LBS
1/2"	3.54	2.63	4xØ0.63	0.58	2.47	5.51	3.23	3.74	6.85	2.13	0.27	M12	8	1.65-F04	M5	159.3	16.59	7.94
3/4"	3.94	3.25	4xØ0.75	0.64	2.64	5.98	3.54	3.9	6.85	2.28	0.27	M12	8	1.65-F04	M5	225.68	30.25	11.25
1"	4.33	3.5	4xØ0.75	0.7	2.78	6.5	4.13	3.94	9.84	2.94	0.37	M16	10	1.96-F05	M6	354	55.75	15.88
1 1/2"	4.92	4.5	4xØ0.86	0.83	4.09	7.48	5.04	4.84	12.64	3.9	0.61	M20	14	1.96-F05	M6	610.65	150.39	29.11
2"	5.91	5	8xØ0.75	0.91	3.54	8.5	5.51	5.24	12.64	4.29	0.65	M20	14	1.96-F05	M6	1062	260.41	38.37

