


760195-V36-V6-V9

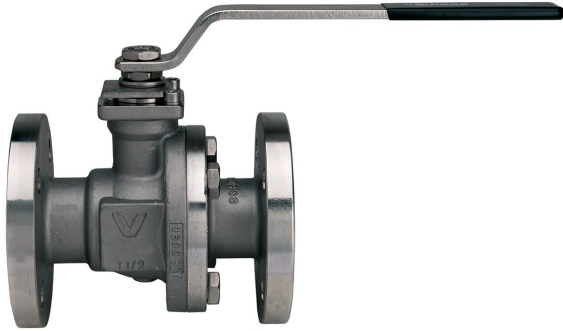


Stainless steel, ANSI class 300 flanged V-ball valve 30-60, 60, 90 degrees V ports.

- Temperature range -4°F to 406°F.
 - Blow-out proof stem, adjustable stem packing.
 - RPTFE seats, packing and thrust washer.
 - 100% tested.
 - PED 97/23/CE.
 - Locking handle plate.
 - Thermal relief hole in the ball.
 - ANSI B16.5, B16.10, B16.34 design.
 - Fire Safe API 6FA-API 607.
 - Antistatic Device.
 - ISO 5211 mounting pad and double "D" stem.
- 760195V36 - 760195V6 - 760195V9: size 1/2" to 6".

COMPLIES WITH NACE MR 0175/ISO 15156 AND NACE MR 0103.

Technical specifications

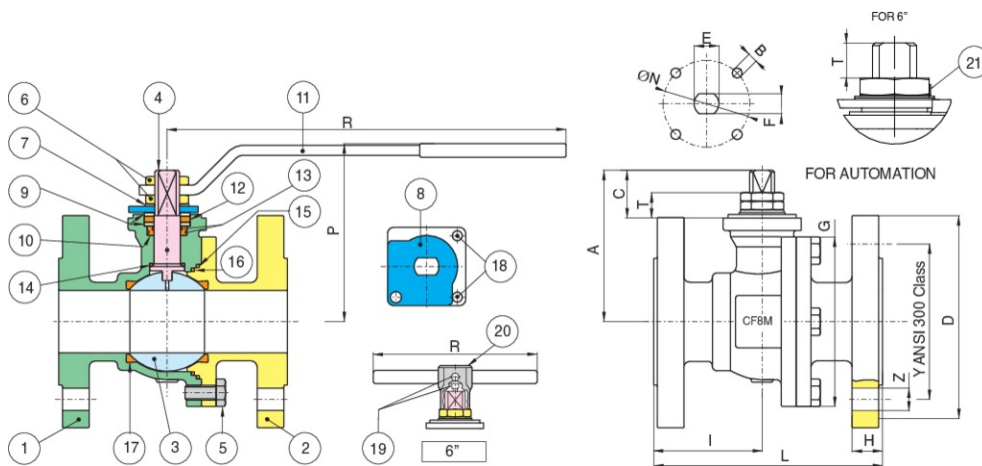



| POSITION | PART NAME | MATERIAL | N.° PIECES |
|----------|-------------------|-----------------------------------|------------|
| 1 | BODY | CF8M | 1 |
| 2 | END CONNECTION | CF8M | 1 |
| 3 | BALL | A479-316/A351-CF8M | 1 |
| 4 | STEM | A479-316 | 1 |
| 5 | SCREW | STAINLESS 1/2"-1 1/2" STEEL 2"-6" | 4 |
| 6 | NUT | STAINLESS 1/2"-1 1/2" STEEL 2"-6" | 2 |
| 7 | SPRING WASHER | STAINLESS STEEL | 2 |
| 8 | TRAVEL STOP | STAINLESS STEEL | 1 |
| 9 | PACKING GLAND | STAINLESS STEEL | 2 |
| 10 | STEM SEAL | PTFE | 1 |
| 11 | HANDLE | STAINLESS STEEL | 1 |
| 12 | STEM SEAL | GRAPHOIL | 1 |
| 13 | O-RING | FKM (VITON) | 2 |
| 14 | THRUST WASHER | RPTFE | 1 |
| 15 | SEAL | GRAPHOIL | 1 |
| 16 | SEAL | PTFE | 1 |
| 17 | BALL SEATS | RPTFE | 2 |
| 18 | SCREW | STAINLESS STEEL | 2 |
| 19 | SCREW | STAINLESS STEEL | 2 |
| 20 | BODY HANDLE | CAST IRON | 1 |
| 21 | Unscrewing grower | A182-F316 | 1 |

| SIZE | D | Y | Z | H | I | L | G | P | R | A | C | T | E | F | ISO 5211 ØN | B | WEIGHT LBS |
|--------|-------|-------|----------|------|------|-------|-------|-------|-------|------|------|------|-----|------|-------------|-----|------------|
| 1/2" | 3.74 | 2.62 | 4xØ0.63 | 0.57 | 2.42 | 5.51 | 3.35 | 3.46 | 5.16 | 2.05 | 0.75 | 0.31 | M10 | 0.28 | 1.65-F04 | M5 | 5.07 |
| 3/4" | 4.53 | 3.25 | 4xØ0.75 | 0.63 | 2.4 | 5.98 | 3.07 | 3.66 | 5.16 | 2.2 | 0.75 | 0.31 | M10 | 0.28 | 1.65-F04 | M5 | 7.71 |
| 1" | 4.92 | 3.5 | 4xØ0.79 | 0.69 | 2.78 | 6.5 | 3.78 | 4.29 | 6.85 | 2.85 | 1.08 | 0.51 | M12 | 0.31 | 1.97-F05 | M6 | 11.46 |
| 1 1/2" | 6.1 | 4.51 | 4xØ0.87 | 0.83 | 3.09 | 7.48 | 4.96 | 5.24 | 9.84 | 4.21 | 1.18 | 0.39 | M16 | 0.39 | 1.97-F05 | M6 | 22.04 |
| 2" | 6.5 | 5 | 8xØ0.79 | 0.89 | 3.39 | 8.5 | 5.37 | 5.67 | 12.64 | 4.8 | 1.52 | 0.71 | M20 | 0.55 | 2.76-F07 | M8 | 26.45 |
| 3" | 8.27 | 6.63 | 8xØ0.87 | 1.14 | 3.19 | 11.14 | 7.03 | 6.81 | 15 | 5.94 | 1.69 | 0.71 | M24 | 0.71 | 4.02-F10 | M10 | 59.51 |
| 4" | 10.04 | 7.87 | 8xØ0.87 | 1.26 | 3.48 | 12.01 | 8.62 | 7.36 | 15 | 6.5 | 1.69 | 0.71 | M24 | 0.71 | 4.02-F10 | M10 | 90.36 |
| 6" | 12.6 | 10.63 | 12xØ0.87 | 1.46 | 6.77 | 15.87 | 12.05 | 12.01 | 27.56 | 9.65 | 2.68 | 1.08 | M42 | 1.18 | 4.92-F12 | M12 | 204.97 |